

High tech, high yield

**Electrofusion Units
MSA 4.0 and MSA 4.1**



We cover your needs today and in future


Gas and water companies as well as installers are becoming more demanding. The MSA 4.0 and MSA 4.1 electrofusion units offer a flexible and open platform which can be upgraded to cope with future challenges.

+ Full of values



The cutting-edge electrofusion solutions: they adapt to any situation

+ User-friendly and flexible

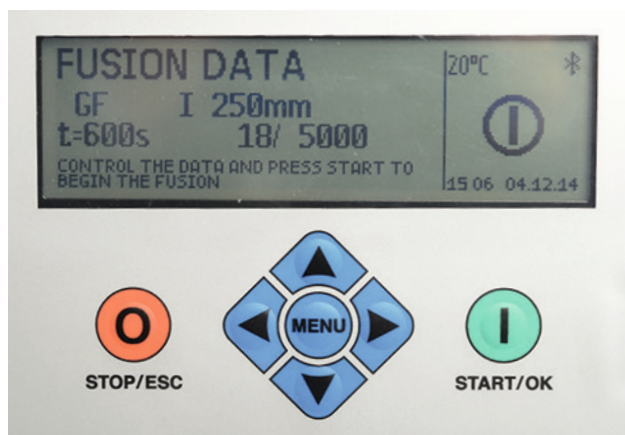

User-friendly

- Large graphical display, big fonts and intuitive icons keep the user interface readable even from 3 meters
- Integrated online help gives advice during the welding process and in case of drawbacks
- Long distance scanner and START/STOP commands on a badge to interact from 3 meters without going up and down of the ditch
- Clear traceability of actions, error messages and audible signals



Connected

- GPS to allow trench localization and automatic map creation in combination with the mini MSA Welding Book application included
- Fast USB port to save recorded protocols, upgrade languages and change and save workflow configuration
- Bluetooth interface to connect to wireless devices
- HSPA+ mobile telecommunication network to enable the connectivity to the company office/servers (MSA 4.1)



Flexible

- Selection of barcode readers offers a perfect balance between costs and benefits for each installer. Traditional 1D scanner or 2D wired scanner to read both existing barcodes and QR codes; wireless scanner 1D/2D to minimize the cables
- Easy set up in the configuration menu via USB encrypted file to suit all customer needs
- Manual and automatic input of the operator code, job and sketch number, fusion and traceability data to comply to ISO standard, enabling the entering of custom data by the installation company
- Ready for online services: upgradeable with Android apps (MSA 4.1), useable in combination with software applications on Windows platform

Weld and track under any site conditions

+ Powerful, safe, durable and ergonomic



Powerful

- High power efficiency, thanks to the inverter technology inside, for welding in combination with small power generators
- Up to 3.6kW of true power supplied to the fitting, also for welding big couplers
- Unique air flow system design, to improve the heat dissipation for welding in series without stopping to cool the machine down

Safe

- Continuously monitored welding process to stop promptly, if the fitting, generator or ambient conditions are not suitable
- Electrical ON/OFF switch in the upper part of the unit to turn off the machine in case of problems
- Unique protection against dust and water, for a safe work under harsh conditions
- Electronic sensors react in case of emergency and protect the machine

Durable

- Sturdy die-cast aluminum housing combines a lot of advantages such as thermal exchange, shock absorption and long work life span
- Special designed feet to keep the electronic core out the mud and improve the stability on uneven ground
- Stored in a professional transport box, with ventilation gutter, to let the humidity go away, when the machine is stored in the warehouse

Ergonomic


- Light weight design with comfortable plastic handle to ensure ergonomic handling and transportation
- Compact housing to facilitate the usage in cramped spaces and when working at height
- Cables wound on separate sides of the machine to be quickly wrapped when moving from joint to joint

We complement your work


MSA 4.0 and MSA 4.1 are not just electrofusion units: they are a system in the trench. These units encompass all the features to support you in making a fast, safe, high quality and reliable joint. They keep it terrifically simple and flexible.

- Advanced features comply with most sophisticated requirements in gas and water applications. The traceability data (ISO 12176-4) of fittings, pipes and tools can be saved into the fusion record, as well as the GPS coordinates of the weld position.
- Adaptive workflow: a configuration file downloaded via USB memory stick enables the tracking of the information required by the job, like operator code (ISO 12176-3), job and sketch number. This allows the installation company to instantly switch from one grid owner to another, with different procedures in place.
- Operations on site are guided from preparation to finalization of the fusion process. At the end of the welding process, all the recorded data are saved into a high capacity internal memory and can be easily transferred via USB to a personal computer for printing, investigation and digital archive.
- The user is free to retrieve the fusion records in a native PDF format or in an encrypted format and use them in data and network management systems. In both cases, the protocols contain the richest fusion information set available today.


OPERATOR IDENTIT.

22°C



JOB NUMBER

22°C



TRACEAB. FITTING


22°C


GPS DATA
 LONG:011°30.59867E
 LATIT:45°30.63511N
 NUMBER OF SATELLITES ON VIEW: 08
 QUALITY OF SIGNAL: 2 HDOP: 1.44

22°C

 09:16 11.03.14


- Traceability is managed at its best: on top of usual data (ISO 12176-4) the QR code, available on ELGEF products, can be captured to uniquely identify each fitting and link directly to GF Piping Systems online services.
- Photos and videos can be taken during the job: this complementary data can be merged automatically with the recorded fusion protocols in the mini MSA Welding Book.
- The mini MSA Welding Book offers you more opportunities to make your job perfect: based on data collected by the MSA 4 family, it supplies a map of the site you worked in, specific notes concerning the welding, photo zooming and collages of protocols belonging to multiple machines.

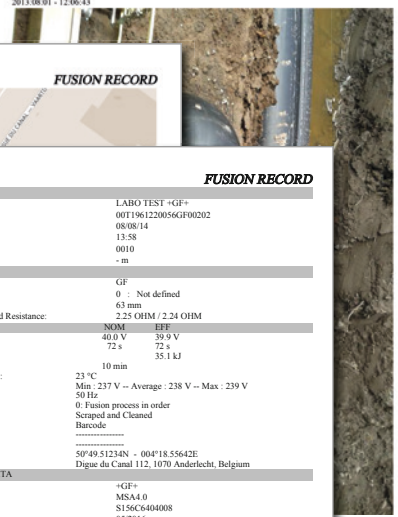

+GF+
 2013.08.01 - 12:06:43
FUSION RECORD


+GF+
FUSION RECORD

GENERAL	
Order Number :	LABO TEST "GF"
Identity Card :	00T1961220056GF00202
Date of installation :	08/08/14
Time :	13:58
Fusion Number :	0010
Depth :	- m
FITTING DATA	
Manufacturer :	GF
Fitting Type :	0 : Not defined
Dimension :	63 mm
Programmed/Measured Resistance :	2.25 OHM / 2.24 OHM
FUSION DATA	
Fusion Voltage :	40.0 V 39.9 V
Fusion Time :	72 s 72 s
Fusion Energy :	35.1 kJ
Cooling Time :	10 min
Ambient Temperature :	23 °C
Mains Voltage :	Min : 237 V -- Average : 238 V -- Max : 239 V
Mains Frequency :	50 Hz
Error Notice :	0: Fusion process in order
Pipes Prepared :	Scraped and Cleaned
Data Input :	Barcode
GPS Coordinates :	50°49'51234N - 004°18'55642E
Address :	Digue du Canal 112, 1070 Anderlecht, Belgium
CONTROL UNIT DATA	
Manufacturer :	+GF+
Model :	MSA4.0
Serial Number :	S156C6404008
Next Revision Date :	05/2016
TRACEABILITY DATA	
Fitting :	FITTING
Manufacturer :	GF
Component Type :	Socket
Dimension :	063 mm
Product Batch :	201212/05
SDR :	11
Material Status :	VIRGIN
PE :	MATERIAL
MFR :	PE100
WELDING NOTE :	10-MFR<=15



+GF+
 Mike Smith
 GFPS

Operator Card

Name :	Smith
Surname :	Smith
Operator ID :	12345
Skills :	Electrofusion, Automatic
Phone Number :	
Badge Expires :	31/12/17
Country :	Belgium
Language :	English
Organization :	GFPS
Position :	Operator

Overview

The MSA 4 family allows you to choose the right model for your daily business and upgrade on request.



MSA 4 Family Overview	MSA 4.0	MSA 4.1
Multiple weldings in sequence	✓	✓
Operating procedures check		
Automatic ambient temperature compensation	✓	✓
Fusion current monitoring (short/interrupt)	✓	✓
Fusion data		
Barcode scanner (ISO 13950 format)	✓	✓
Manual fusion input	✓	✓
Traceability		
Operator code/job number/sketch number	✓	✓
Fittings and pipes traceability (ISO 12176-4)	✓	✓
Global positioning coordinates	✓	✓
QR code	optional	✓
Scraping/aligner tools traceability	✓	✓
GF online services		✓
Data recording		
Documentation of fusion (PDF, BIN, CSV)	✓	✓
Fusion protocol export via USB	✓	✓
mini MSA Welding Book Software	✓	✓
Photos and videos captured by the unit		✓
MSA WeldinOne Software	optional	optional
Operations control		
Display brightness configurable	✓	✓
Configurable languages	up to 32	up to 32
Acoustic alert	✓	✓
Serviceability		
Programmable maintenance interval	✓	✓
Programmable rental time	✓	✓
Software/languages upload via USB memory stick	✓	✓
Usability		
Problem recognition (fittings, generators)	✓	✓
Clear messages to the operator in the display, including help	✓	✓
Remote command via barcode scanner	✓	✓
User configurable workflow	✓	✓
Indication of energy, fusion and cooling time	✓	✓
Different levels of access (admin/user)	✓	✓
Transport box	✓	✓

Specifications

Engineering at its best: High-quality components and materials combined with effective work flow.



Technical specifications	MSA 4.0	MSA 4.1
Operating conditions		
Working temperature range	min. -20 °C, max. +50 °C	min. -20 °C, max. +50 °C
Electrical data		
Input voltage range (Vac)	190 – 265	190 – 265
Frequency range (Hz)	50 - 60	50- 60
Current consumption (Max, A)	16 A	16 A
Output voltage (V ac)	8 – 48	8 – 48
Output current (max, A)	110	110
Input power (kW)	3.5	3.5
Type of protection	IP65	IP65
Protection class	I	I
Electrical switch	✓	✓
Unit fuse	20A slow blow	20A slow blow
Data and operation control		
Data recording capacity (Number of protocols)	5000	5000
Buttons	5+Start+Stop	5+Start+Stop
Display	graphical LCD	graphical LCD
Barcode scanner	1D, optional 2D	wireless, 2D
Connectivity		
GPS Accuracy	3m	3m
Bluetooth coverage	10m	10m
Mobile network		LTE
Communication port	USB Type A	USB Type A
Mechanical data		
Dimensions (mm)	280x480x220	280x480x220
Weight (Kg)	12.5	12.5
Case material	Aluminum	Aluminum
Mains cable length	4 m	4 m
Fusion cable length	4 m	4 m
Mains plug	Schuko 16A	Schuko 16A
Connectors	4 mm	4 mm
Adapters (90°)	4.0 – 4.0 mm/4.0 – 4.7 mm	4.0 – 4.0 mm/4.0 – 4.7 mm
Norms compliance		
EMC (EN61000)	✓	✓
Safety (EN60335)	✓	✓
ISO13950	✓	✓
ISO12176-2/3/4	✓	✓

Worldwide at home

Our sales companies and representatives ensure local customer support in more than 100 countries.

www.gfps.com

Argentina / Southern South America

Georg Fischer Central Plastics Sudamérica S.R.L.
Buenos Aires / Argentina
Phone +54 11 4512 02 90
gfcentral.ps.ar@georgfischer.com
www.gfps.com/ar

Australia

George Fischer Pty Ltd
Riverwood NSW 2210
Phone +61 (0) 2 9502 8000
australia.ps@georgfischer.com
www.gfps.com/au

Austria

Georg Fischer Rohrleitungssysteme GmbH
3130 Herzogenburg
Phone +43 (0) 2782 856 43-0
austria.ps@georgfischer.com
www.gfps.com/at

Georg Fischer Fittings GmbH
3160 Traisen
Phone +43 (0) 2762 90300
fittings.ps@georgfischer.com
www.fittings.at

Belgium / Luxembourg

Georg Fischer NV/SA
1600 Sint-Pieters-Leeuw / Belgium
Phone +32 (0) 2 556 40 20
Fax +32 (0) 2 524 34 26
be.ps@georgfischer.com
www.gfps.com/be

Brazil

Georg Fischer Sist. de Tub. Ltda.
04571-020 São Paulo/SP
Phone +55 (0) 11 5525 1311
br.ps@georgfischer.com
www.gfps.com/br

Canada

Georg Fischer Piping Systems Ltd
Mississauga, ON L5T 2B2
Phone +1 (905) 670 8005
Fax +1 (905) 670 8513
ca.ps@georgfischer.com
www.gfps.com/ca

China

Georg Fischer Piping Systems Ltd
Shanghai 201319
Phone +86 21 3899 3899
china.ps@georgfischer.com
www.gfps.com/cn

Chinaust Plastics Corp. Ltd.
Songliandian, Zhuozhou city,
Hebei province, China, 072761
Phone +86 312 395 2000
Fax +86 312 365 2222
chinaust@chinaust.com
www.chinaust.com.cn

Denmark / Iceland

Georg Fischer A/S
2630 Taastrup / Denmark
Phone +45 (0) 70 22 19 75
info.dk.ps@georgfischer.com
www.gfps.com/dk

Finland

Georg Fischer AB
01510 Vantaa
Phone +358 (0) 9 586 58 25
Fax +358 (0) 9 586 58 29
info.fi.ps@georgfischer.com
www.gfps.com/fi

France

Georg Fischer SAS
95932 Roissy Charles de Gaulle Cedex
Phone +33 (0) 1 41 84 68 84
fr.ps@georgfischer.com
www.gfps.com/fr

Germany

Georg Fischer GmbH
73095 Albershausen
Phone +49 (0) 7161 302 0
info.de.ps@georgfischer.com
www.gfps.com/de

India

Georg Fischer Piping Systems Pvt. Ltd
400 083 Mumbai
Phone +91 22 4007 2000
Fax +91 22 4007 2020
branchoffice@georgfischer.com
www.gfps.com/in

Italy

Georg Fischer S.p.A.
20063 Cernusco S/N (MI)
Phone +39 02 921 861
it.ps@georgfischer.com
www.gfps.com/it

Georg Fischer TPA S.r.l.
IT-16012 Busalla (GE)
Phone +39 010 962 47 11
tpa.ps@georgfischer.com
www.gfps.com/it

Japan

Georg Fischer Ltd
530-0003 Osaka
Phone +81 (0) 6 6341 2451
jp.ps@georgfischer.com
www.gfps.com/jp

Korea

Georg Fischer Korea Co. Ltd
Unit 2501, U-Tower
120 Heungdeok Jungang-ro
(Yeongdeok-dong)
Giheung-gu, Yongin-si, Gyeonggi-do
Phone +82 31 8017 1450
Fax +82 31 217 1454
kor.ps@georgfischer.com
www.gfps.com/kr

Malaysia

George Fischer (M) Sdn. Bhd.
41200 Klang, Selangor Darul Ehsan
Phone +60 (0) 3 3122 5585
Fax +60 (0) 3 3122 5575
my.ps@georgfischer.com
www.gfps.com/my

Mexico / Northern Latin America

Georg Fischer S.A. de C.V.
CP 66636 Apodaca, Nuevo Leon / Mexico
Phone +52 (81) 1340 8586
Fax +52 (81) 1522 8906
mx.ps@georgfischer.com
www.gfps.com/mx

Middle East

Georg Fischer Piping Systems (Switzerland) Ltd
Dubai / United Arab Emirates
Phone +971 4 289 49 60
gcc.ps@georgfischer.com
www.gfps.com/int

Netherlands

Georg Fischer N.V.
8161 PA Epe
Phone +31 (0) 578 678 222
nl.ps@georgfischer.com
www.gfps.com/nl

Georg Fischer Waga N.V.
NL-8160 AG Epe
Phone +31 (0) 578 678 378
waga.ps@georgfischer.com
www.waga.nl

New Zealand

Georg Fischer Ltd
5018 Upper Hutt
Phone +04 527 9813
Fax +04 527 9834
nz.ps@georgfischer.com
www.gfps.com/nz

Norway

Georg Fischer AS
1351 Rud
Phone +47 67 18 29 00
no.ps@georgfischer.com
www.gfps.com/no

Poland

Georg Fischer Sp. z o.o.
05-090 Sekocin Nowy
Phone +48 (0) 22 31 31 0 50
poland.ps@georgfischer.com
www.gfps.com/pl

Romania

Georg Fischer Piping Systems (Switzerland) Ltd
020257 Bucharest - Sector 2
Phone +40 (0) 21 230 53 80
ro.ps@georgfischer.com
www.gfps.com/int

Russia

Georg Fischer Piping Systems (Switzerland) Ltd
Moscow 125040
Phone +7 495 748 11 44
ru.ps@georgfischer.com
www.gfps.com/ru

Singapore

George Fischer Pte Ltd
528 872 Singapore
Phone +65 6747 0611
Fax +65 6747 0577
sgp.ps@georgfischer.com
www.gfps.com/sg

Spain / Portugal

Georg Fischer S.A.
28046 Madrid / Spain
Phone +34 (0) 91 781 98 90
es.ps@georgfischer.com
www.gfps.com/es

Sweden

Georg Fischer AB
117 43 Stockholm
Phone +46 (0) 8 506 775 00
info.se.ps@georgfischer.com
www.gfps.com/se

Switzerland

Georg Fischer Rohrleitungssysteme (Schweiz) AG
8201 Schaffhausen
Phone +41 (0) 52 631 3026
ch.ps@georgfischer.com
www.gfps.com/ch

Taiwan

Georg Fischer Co. Ltd
San Chung Dist., New Taipei City
Phone +886 2 8512 2822
Fax +886 2 8512 2823
www.gfps.com/tw

United Kingdom / Ireland

Georg Fischer Sales Limited
Coventry, CV2 2ST / United Kingdom
Phone +44 (0) 2476 535 535
uk.ps@georgfischer.com
www.gfps.com/uk

USA / Caribbean

Georg Fischer LLC
92618 Irvine, CA / USA
Phone +1 714 731 88 00
Fax +1 714 731 62 01
us.ps@georgfischer.com
www.gfps.com/us

Georg Fischer Central Plastics LLC
Shawnee, OK 74801 / USA
Phone +1 (405) 273 63 02
gfcentral.ps@georgfischer.com
www.centralplastics.com

Vietnam

George Fischer Pte Ltd
Representative Office
Ho Chi Minh City
Phone +84 28 3948 4000
Fax +84 28 3948 4010
sgp.ps@georgfischer.com
www.gfps.com/vn

International

Georg Fischer Piping Systems (Switzerland) Ltd
8201 Schaffhausen / Switzerland
Phone +41 (0) 52 631 3003
Fax +41 (0) 52 631 2893
info.export@georgfischer.com
www.gfps.com/int

The information and technical data (altogether "Data") herein are not binding, unless explicitly confirmed in writing.
The Data neither constitutes any expressed, implied or warranted characteristics, nor guaranteed properties or a guaranteed durability. All Data is subject to modification. The General Terms and Conditions of Sale of Georg Fischer Piping Systems apply.